

CT Series

Functional features Multi-purpose usage

CT SERIES-COMBINED EGG INCUBATORS



CT60c

Egg Capacity			
	Setter	Hatcher	TOTAL
Hen	40	12	52
Quail	72-104*	40	112-144*
Turkey	28	10	38
Partridge	56	30	86
Pheasant	48	24	72
Duck	28	10	38
Goose	15	6	21

CT90c

Egg Capacity			
	Setter	Hatcher	TOTAL
Hen	60	24	84
Quail	108-156*	80	188-236*
Turkey	40	20	60
Partridge	84	60	144
Pheasant	72	48	120
Duck	40	20	60
Goose	24	12	36



CT120c


Egg Capacity			
	Setter	Hatcher	TOTAL
Hen	90	24	114
Quail	162-234*	80	242-314*
Turkey	60	20	80
Partridge	126	60	186
Pheasant	108	48	156
Duck	60	20	80
Goose	36	12	48

*with QT13 quail tray



CT Series Combined Egg Incubators

CT Series Combined Egg Incubator Models gives chance user to do setting and hatching process at the same time. Eggs are set partially and even different poultry eggs having different incubation time can be set at the same time.

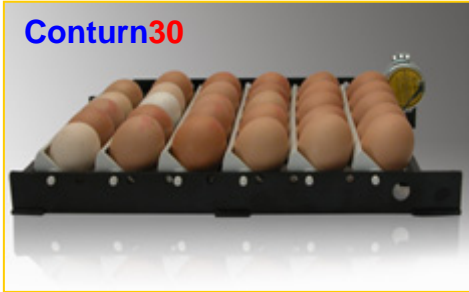

Conturn30




CS24



CS6

Conturn30 – Automatic egg turning trays, **CS6** and **CS24** hatchery baskets provide very functional and hygienic usage.

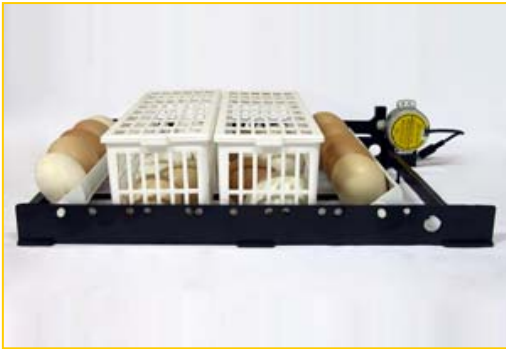

Conturn30 is combined with 2 pieces **CS6** hatchery baskets in **CT60c** model. Other models have separated setter trays and hatcher baskets

CS24 - hatchery baskets with their separated parts provides you hatching of different type of eggs in different baskets. Also, **CS24** hatchery baskets fit tiers of all combined models. This provides user to change combined(c) models to a hatcher model easily.



CLS Cabinet panels provide **high temperature insulation** and protect your eggs against electricity cutoffs for a long time. Temperature control is fully digital and more precise with **PID parameters**, which also ensures minimum energy consumptions.




CT Series Combined Egg Incubators


Digital controller




Turning connection



Adjustable air vent

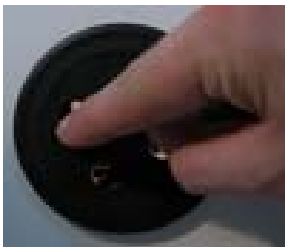

Features	
Egg capacity	CT60c : 52 chicken eggs (40 setter + 12 hatcher) CT90c : 84 chicken eggs (60 setter + 24 hatcher) CT120c : 114 chicken eggs (90 setter + 24 hatcher)
Accessories	CT60c : (1 x Conturn30) + (1 x Conturn30 /CS6) CT90c : (2 x Conturn30) + (1 x CS24) CT120c : (3 x Conturn30) + (1 x CS24)
Power	220/230 Volt – 50 / 60 HZ. Power : CT60c: avr.: 60w max: 165W CT90c: avr: 65w max: 165W CT120c: avr: 70w max: 175W
Cabinet	High insulation CLS panels Double-glazed window in door with full sight 2.service door in backside
Ventilation	Airroute - perfect laminar flow, Forced ventilation with unique fan Adjustable air outlet vent for controlling of air current
Temperature	PID- Digital temperature control Electronic temperature sensor Digital temperature display(0,1 decimal), Stainless heaters Digital calibration property
Humidity	2 pieces water pan with 3 division for humidification Wet Bulb Thermometer (assembled in door window)
Turning	Conturn30 – fully automatic continuous turning Turning power connections / 12VAC
Light	Inside light with on- off button in control panel
Others	Fully assembled, no need for montage Safety fuses

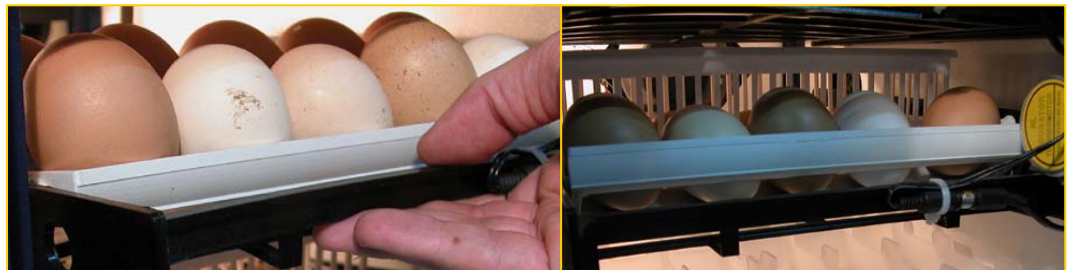

We reserve the right to change specifications due to our policy of improvement.

Product Pages:

CT60c : www.kulucka.com/eng/ct60c.html

CT90c : www.kulucka.com/eng/ct90c.html

CT120c : www.kulucka.com/eng/ct120c.html

